

Fuses

ATM-3

EMX-30

EL B-80

Circuit Breaker and

ATC/ATM Fuse Service Kits available—see page 89

More fuse styles and sizes available online! Look for ABC, MDA, FRS-R, KLM, KTK and other Bussmann[®] fuses at store.polarwire.com

AGC-10 AGC-10 ATC-20 ATC-20 ATC-20 ATC-15-ID ATC-30 ATC-15-ID GMT-5 GMT-5 AMG-175 AMG-175 AMG-175

Glass Tube Fuses

Part Description

- AGC Fast-acting, 32V, 1A to 30A. Up to 10A also rated up to 250VAC 1/4" x 1 1/4". Nickel-plated brass end caps. UL listed.
- SFE Fast-acting, size-rejecting. 32VDC, 4A to 30A. 1/4" diameter, length varies. Nickel-plated brass encamps. Made to SAE specs. UL listed.

Blade Style Fuses

- ATC Fast-acting, 32VDC, 3A to 40A. Color coded plastic housing, enclosed zinc fuse element. Tinned blades. UL Recognized.
- ATC-ID Lights to indicate blown condition. Fast-acting, 32VDC, 1A to 40A. Color coded plastic, enclosed zinc fuse element.
- ATM MINI fast-acting, 32VDC, 5 to 30 amps. Color coded plastic housing, enclosed zinc fuse element. UL Recognized.
- ATM-LP Low profile fast-acting, 32VDC, 2 to 30 amps. Color coded plastic housing, enclosed zinc fuse element. UL Recognized.
- MAXI Fast-acting, high amp fuse. 32VDC, 30 to 80 amps. Color coded plastic housing, enclosed zinc fuse element. UL Recognized.

Stud Mount Fuses and Voltage Limiters

AMG Bolt-in automotive fuse. 32VDC, 100A to 300A. Ignition protected.
ANL Fast acting, low voltage current limiter, non time-delay, 80VDC, 35A to 750A. Silver plated contacts, mica window to identify status.
ANN Very fast acting, low voltage limiter, time-delay for inductive circuits, 80VDC, 125VAC, 10A to 800A. Silver plated contacts, mica window.

Cartridge Fuses and Fusible Links

- FMX Time delay, non-indicating, color coded plastic. 32VDC, 20 to 60A. FMX-LP Low profile time delay, non-indicating, color coded. 32VDC, 20 to 60A.
- FLB Bolt-on fusible link, color coded plastic housing. 32VDC, 30 to 100A.

Class T Fuses


JJN Very fast acting current limiting. 160VDC, 300VAC,150A to 500A.

Telecom Indicating Fuses

GMT Fast-acting, for use in HLT, HLS, PCT holders. 60VDC, 125 VAC, 1/4A to 15A. Tinned beryllium copper terminals. UL recognized.

High Amp and Mid-Range Circuit Breakers

J.IN-250

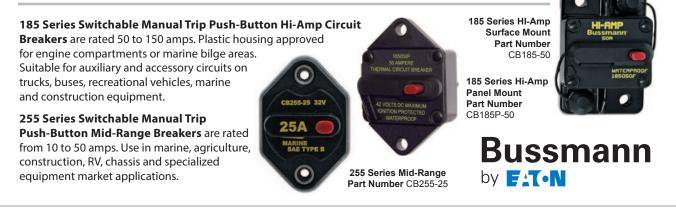

116

Shop our online store!



www.polarwire.com